


Shelly Pro 2 V1

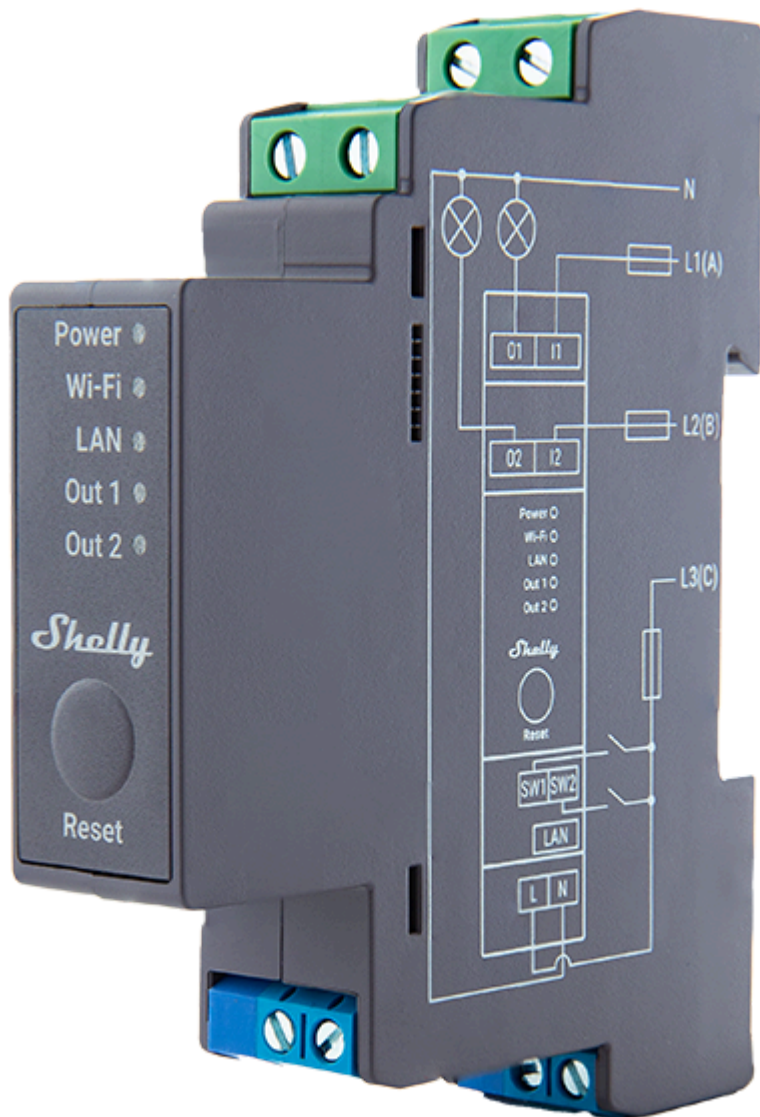

Shelly Pro 2 v.1 is a modification of Shelly Pro 2 (SPSW-002XE16EU)

Shelly Pro 2 v.0 is now obsolete and out of sale.

Differences with Shelly Pro 2 v.0 are marked by the ≠ symbol in the text below.

Main changes:

- Power supply: no more 12 VDC option.
- Relay: no more DC switching
- Connectors: 3-terminal connectors are replaced by 2-terminal ones.

- PCBs: relay 2-layer PCBs are replaced by 4-layer ones for better thermal performance.
- LAN: improved high voltage electrical distances.
- Plastics shell: improved dielectric performance.

Device identification (≠)

- Device name: **Shelly Pro 2 v.1**
- Device model: **SPSW-202XE16EU**
- Device SSID: **ShellyPro2-XXXXXX**

Short description

Shelly Pro 2 is a DIN rail mountable 2-channel smart switch with potential-free contacts. Enhanced with all the gen2 firmware flexibility and LAN connectivity, it provides professional integrators with many more options for end customer solutions. It can work standalone in a local Wi-Fi network or it can also be operated through cloud home automation services.

Shelly Pro 2 can be accessed, controlled and monitored remotely from any place where the User has internet connectivity, as long as the device is connected to a Wi-Fi router and the Internet.

Shelly Pro 2 has an embedded Web Interface which can be used to monitor and control the device, as well as adjust its settings.


Main applications

- Residential
- MDU (Multi Dwelling Units - apartments, condominiums, hotels, etc.)
- Light commercial (small office buildings, small retail/restaurant/gas station, etc.)
- Government/municipal
- University/college

Integrations

- Google
- Alexa
- Samsung SmartThings

Simplified internal schematics (≠)

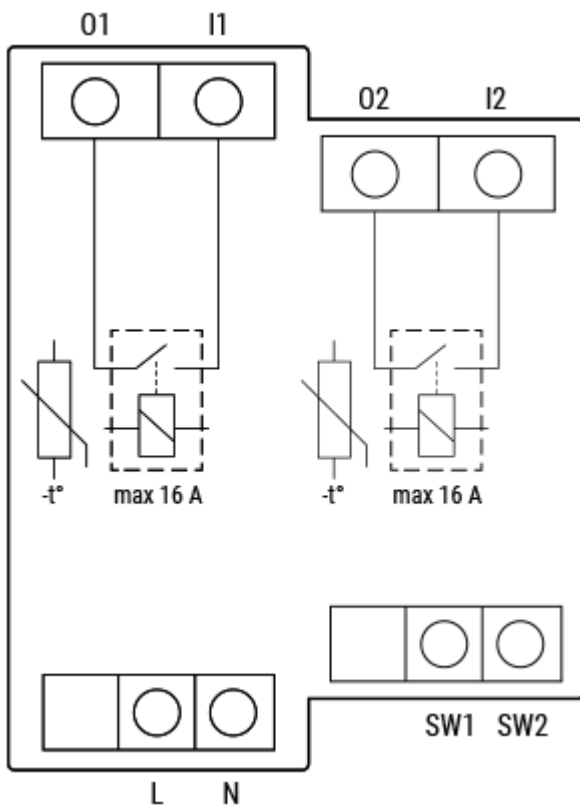

Device electrical interfaces

Inputs

- 2 switch/button inputs on screw terminals: **SW1** and **SW2**
- 2 power supply inputs on screw terminals: 1 **N** and 1 **L**
- 2 relay inputs: **I1** and **I2**

Outputs

- 2 relay outputs: **O1** and **O2**


Ethernet port

- 1 RJ45 connector

⚠CAUTION! Plug in or unplug the LAN cable only when the Device is powered off! The LAN cable connector must not be metallic in the parts touched by the user to plug in or unplug the cable.

Add-on interface

- Shelly proprietary serial interface

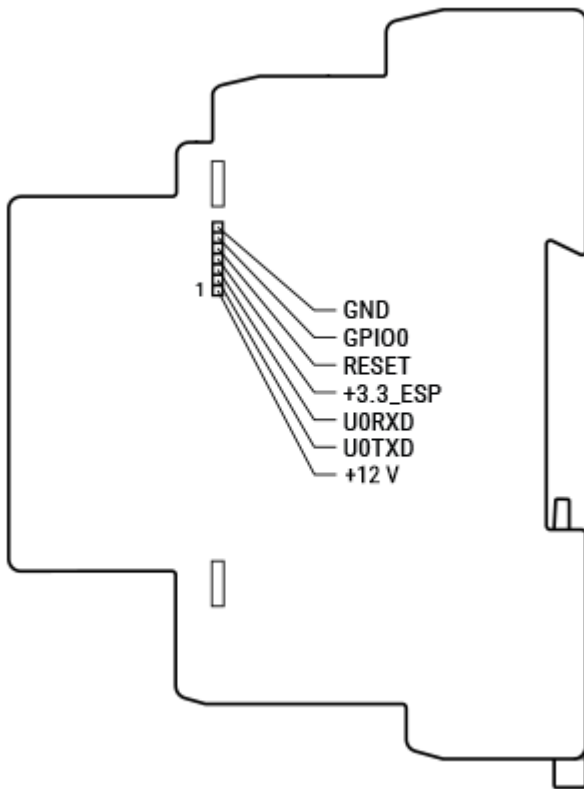

⚠CAUTION! High voltage on the add-on interface when the Device is powered!

Connectivity

- Ethernet
- Wi-Fi
- Bluetooth

Safety features

- Overheating protection

Supported load types

- Resistive (incandescent bulbs, heating devices)
- Capacitive (capacitor banks, electronic equipment, motor start capacitors)
- Inductive with RC Snubber (LED light drivers, transformers, fans, refrigerators, air-conditioners)

User interface

Inputs

- One tactile dome button

- Press and hold 5 sec to reboot.
- Press and hold 10 sec to factory reset.

Outputs

- LED indication
 - Power (red): Red light indicator will be on if power supply is connected.
 - Wi-Fi (varies):
 - Blue light indicator will be on if in AP mode.
 - Red light indicator will be on if in STA mode and not connected to a Wi-Fi network.
 - Yellow light indicator will be on if in STA mode and connected to a Wi-Fi network. Not connected to Shelly Cloud or Shelly Cloud disabled.
 - Green light indicator will be on if in STA mode and connected to a Wi-Fi network and to the Shelly Cloud.
 - The light indicator will be flashing Red/Blue if OTA update is in progress.
 - LAN (green): Green light indicator will be on if LAN is connected.
 - Out 1 (red): Red light indicator will be on if the Output 1 relay is closed.
 - Out 2 (red): Red light indicator will be on if the Output 2 relay is closed.


Specifications (≠)

| Type | Value |
|-----------------------------|---|
| Physical | |
| Size (HxWxD): | 94x19x69 ±0.5 mm / 3.70x0.75x2.71 ±0.02 in |
| Weight: | 76 g / 2.68 oz |
| Mounting: | DIN rail |
| Screw terminals max torque: | 0.4 Nm / 3.54 lbin |
| Conductor cross section: | 0.5 to 2.5 mm ² / 20 to 14 AWG (green connectors) 0.5 to 1.5 mm ² / 20 to 16 AWG (blue connectors) |
| Conductor stripped length: | 6 to 7 mm / 0.24 to 0.28 in (green connector) 5 to 6 mm / 0.20 to 0.24 in (blue connectors) |

| | |
|--------------------------------|---|
| Shell material: | Plastic |
| Color: | Gray |
| Environmental | |
| Ambient temperature: | -20 °C to 40 °C / -5 °F to 105 °F |
| Humidity | 30 % to 70 % RH |
| Max. altitude | 2000 m / 6562 ft |
| Electrical | |
| Power supply voltage AC: | 110 - 240 V |
| Power supply voltage DC: | N/A |
| Power consumption: | < 3 W |
| Neutral not needed: | No |
| Output circuits ratings | |
| Max switching voltage AC: | 240 V |
| Max switching voltage DC: | N/A |
| Max switching current AC: | 16 A per channel, 25 A total |
| Max switching current DC: | N/A |
| Sensors, meters | |
| Temperature sensor: | Yes |
| Radio | |
| RF band: | 2400 - 2495 MHz |
| Max. RF power: | <20 dBm |
| Wi-Fi protocol: | 802.11 b/g/n |
| Wi-Fi Range: | Up to 30 m / 100 ft indoors and 50 m / 160 ft outdoors (Depends on local conditions) |
| Bluetooth Protocol: | 4.2 |
| Bluetooth Range: | Up to 10 m / 33 ft indoors and 30 m / 100 ft outdoors (Depends on local conditions) |

| | |
|------------------------------|-------------------------|
| MCU | |
| CPU: | ESP32-D0WDQ6 |
| Flash: | 8 MB |
| Firmware capabilities | |
| Schedules: | 20 |
| Webhooks (URL actions): | 20 with 5 URLs per hook |
| Scripting: | Yes |
| MQTT: | Yes |
| CoAP: | No |

Basic wiring diagram (≠)

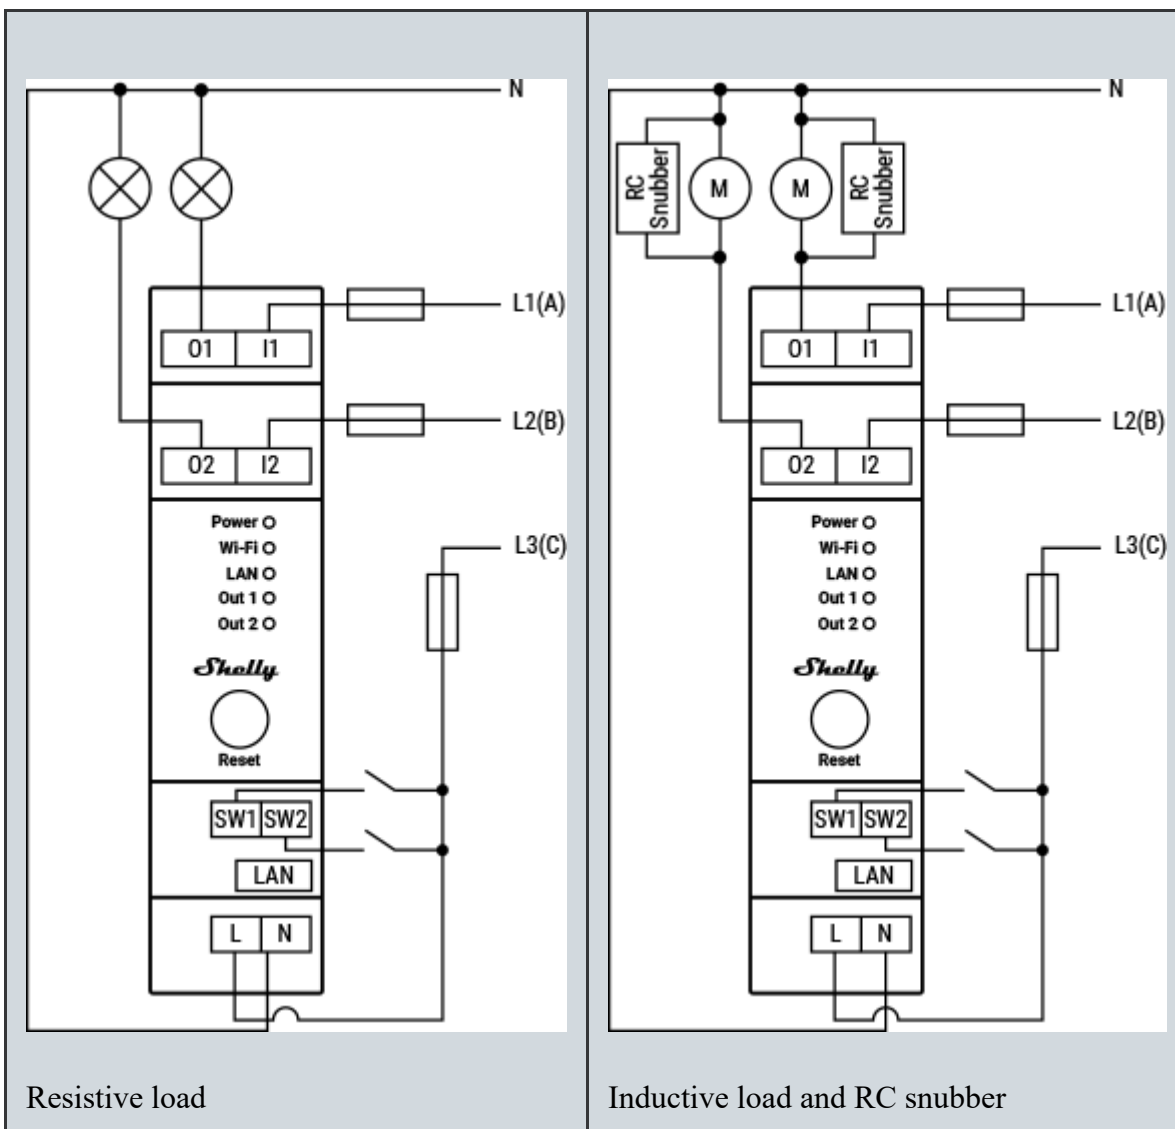

Legend

| Terminals | | Wires | |
|-----------|------------------------------------|-------|---|
| I1, I2 | Load circuit input terminals | L1(A) | Load circuit 1 live (110-240 V) wire |
| O1, O2 | Load circuit output terminals | L2(B) | Load circuit 2 live (110-240 V) wire |
| SW1, SW2 | Switch/button input terminals | L3(C) | Device power supply live (110-240 V) wire |
| L | Live (110-240 V) terminal | N | Neutral wire |
| N | Neutral terminal | | |
| LAN | Local Area Network RJ 45 connector | | |

Shelly Smart Control

- [Adding the device to the Shelly Smart Control](#)

Shelly Web user interface

- [Shelly Pro 2 Web user interface guide](#)

Troubleshooting

...

Components and APIs

- [This device](#)
- [All Shelly devices and services](#)

Printed user guide

- [Shelly Pro 2 multilingual printed user guide.pdf](#)
- [Ръководство за употреба и безопасност](#)

Compliance

- [Shelly Pro 2 multilingual EU declaration of conformity 2025-07-22.pdf](#)

- [Shelly Pro 2 UK PSTI ACT Statement of compliance.pdf](#)
- [Shelly PRO 1&PRO 2 AU NZ Certificate for Suitability.pdf](#)

Compliance archive

[Shelly Pro 2 multilingual EU declaration of conformity 7-2 2022-08-22.pdf](#)

Installation guides

- [Using Shelly Pro 2/2PM V1 with multiple switches to control dual lights](#)
- [Using Shelly Pro 2/2PM V1 with multiple buttons to control dual lights](#)